

ARDEX TLT™

WATERPROOFING ACCESSORIES

- A modified polyethylene (PEVA) core with a non-woven polypropylene on both sides
- Provides protection of the substrate from moisture penetration
- The waterproof membrane is 5-mil thick and has a water vapor permeance of 0.051 perms, when tested according to ASTM E96, using Procedure E at 90% relative humidity

Accessories:

ARDEX TLT™ Waterproofing and Vapor Retarder Membrane


ARDEX TLT™ Seam Tape

ARDEX TLT™ Mixing/Pipe Valve Seals

ARDEX TLT™ Inside & Outside Corners

For complete technical documentation, please see the Technical Data at www.ardexamericas.com

systemONE™
warranty

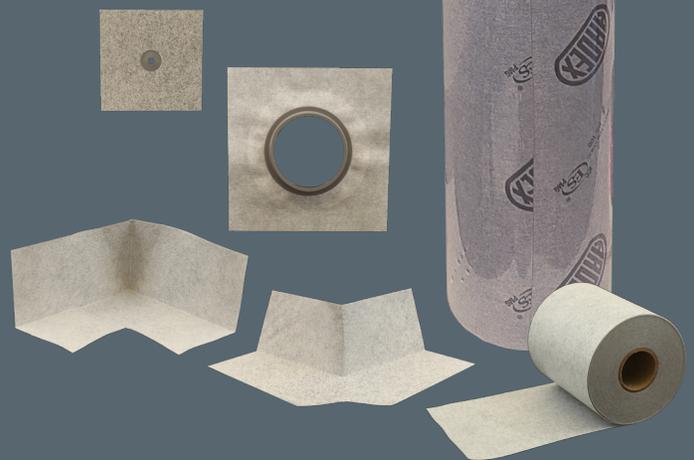

ARDEX Americas
400 Ardex Park Drive
Aliquippa, PA 15001
888-512-7339

www.ardexamericas.com